


GS2050 Lift-out Access Door

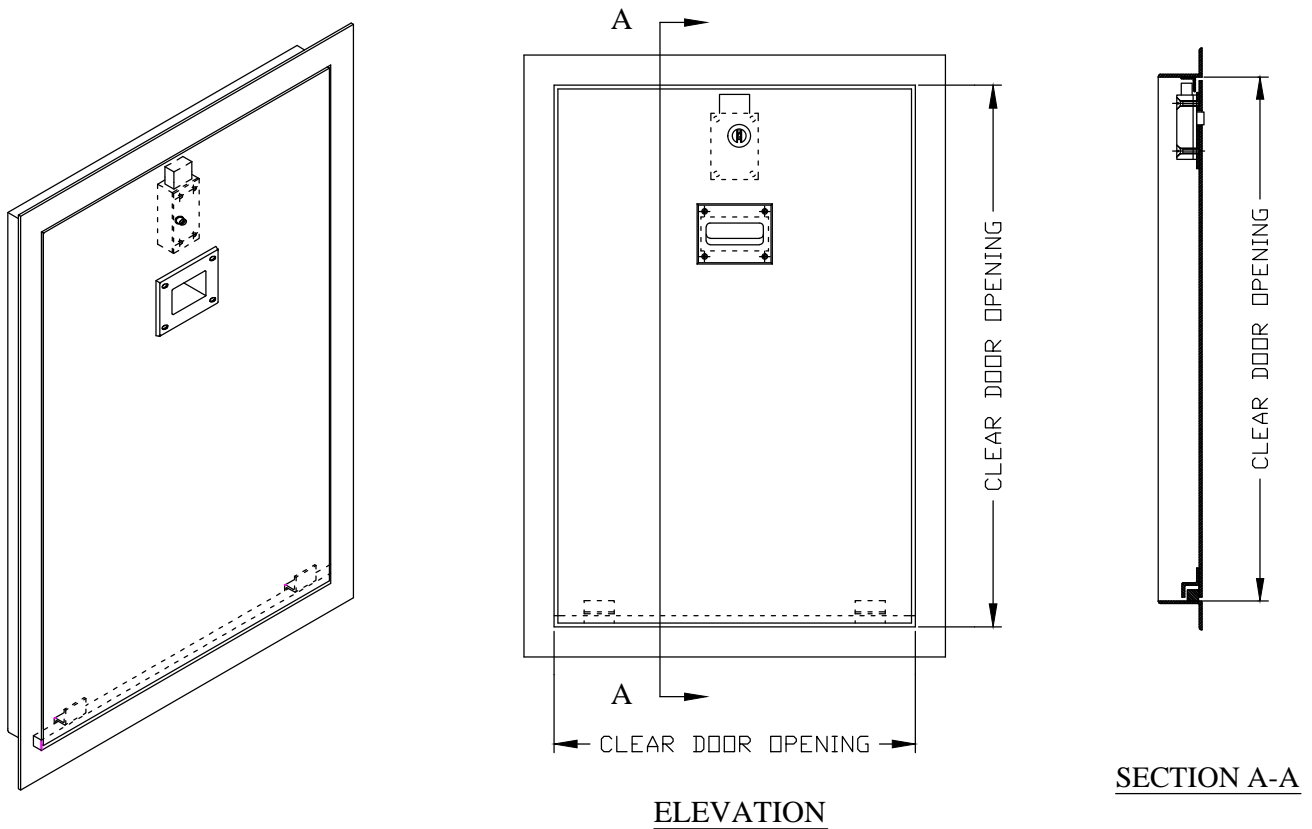

SPECIFICATIONS LIFT-OUT ACCESS DOOR

- Door: 7Ga steel plate with cut-out for recessed door pull.
- Frame: 2"x3"x3/16" steel angle frame with angles coped at ends.
- Door stop: 3/4"x3/4"xDoor Width steel square welded to frame and two "Z" shaped clips welded to the door.
- Finish: one coat of rust inhibitive red prime.
- Other finishes and materials available upon request as a special order.

#GS2050 (24x24" NOMINAL)

#GS2050 (24"x36" NOMINAL)

STANDARD DOORS ARE PREPPED FOR EMBEDMENT AND DETENTION LOCK

OPTIONS:

-STAINLESS STEEL ADD x SS

-MECHANICALLY ANCHORED FRAME ADD x ANC